

Loop

Wireless  
Portable **R8**  
Audio Receiver




User Guide

## PACKAGE CONTENTS

1. Gift Box      2. Wireless Audio Receiver      3. a Manual

## PRODUCT OVERVIEW

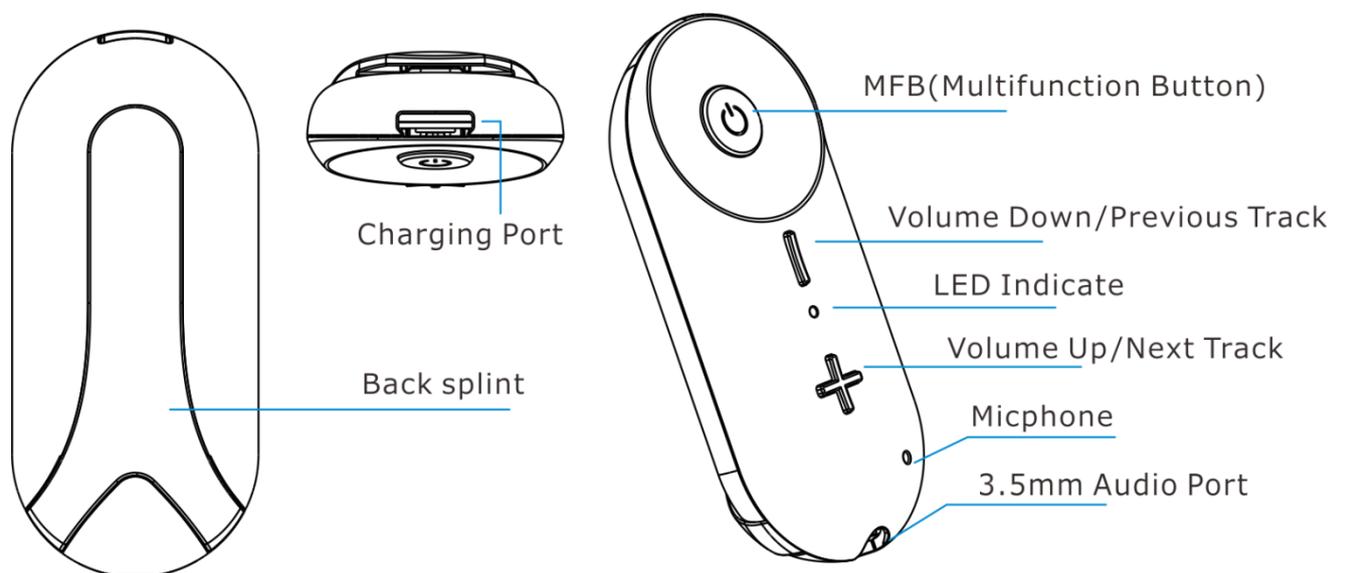

## BUTTON CONTROL

- a. Power On: When off, Press and hold the MFB for 2 seconds .
- b. Power off: When on, Press and hold the MFB for 3 seconds .
- c. Play/Pause: Press the MFB once in audio mode .

- d. Volume+/-: Press the Volume+ or Volume- button once
- e. Next /Previous Track: Press and hold the Volume+ or Volume- button for 2 seconds .
- f. Answering phone Call: When you receive an incoming call, press the MFB button once.
- g. End a phone call: During a call, press the MFB button once .
- h. Reject a phone call: When you receive an incoming call, press and hold the MFB Button for 2 seconds .
- i. Number Redial: Press the MFB button twice to redial the latest phone number .
- j. Paring Mode: When the loop R8 is off, Press and hold the MFB button for 5 seconds until the LED indicator Flashes red and blue ,activate BT on your phone and set it to search for loop R8.

## **LED Indicators**

<b>LED Indicator</b>	<b>Status</b>
Red -Solid	Charging
Blue-Solid	Fully Charged
Blue and Red-Flashing	In Paring Mode
Blue-Flashes every 2	Not paired with any device

seconds	
Blue-Flashes every 5 seconds	Pairing with a device
Red-Flashing	Low Battery

## **Pairing with Two BT Devices at the Same Time**

You can pair your loop R8 with two devices ,but only one of them can play music or make phone calls with the R8 at any time

- 1.)Follow the previous instructions in the "Pairing "section above to pair R8 to your first device.
- 2.)Turn off the BT function on your first device and follow the paring instructions above again to pair to your second BT device .

### **Note:**

- The Receiver will remember previously paired devices and will attempt to pair with the last connected device automatically.

## **Safety and Care**

- 1.) Although the Receiver are equipped with necessary battery regulators, it is recommended not to use Quick/Fast Chargers which tend to over-charge the device and can reduce the lifespan of the battery substantially.
- 2.) Do not charge R8 when they are Wet due to sweat or other Moisture.
- 3.) Wipe away any excess sweat or moisture before and during use, any prolonged exposure to sweat can corrode the Liquipel coating and can penetrate through and damage internal components.
- 4.) Keep the receiver away from extreme heat and humidity. High heat will decrease the lifespan of the Receiver and battery.
- 5.) The Receiver should be charged at least once every 6 months.
- 6.) Clean with a soft cloth, damp with diluted soap water solution if necessary .Never use chemical cleaners.
- 7.) Do not drop the Receiver on hard surfaces.
- 8.) Do not take the Receiver apart
- 9.) When not use, power the Receiver off and store in a cool, dry place.

10.)Overcharging or keeping the Receiver in a closed car or similar environment for long periods will reduce the capacity and life of the battery. It is not recommended to charge your Receiver overnight.

### **WARNING :**

Using Receiver at high to moderate Volumes for extended periods of time will result in permanent hearing damage .It is advised you keep volume levels moderate to low at all times for your safety.

It is advised to turn the volume on your device all the way down before connecting your Receiver, then gradually increase the volume Untill you reach a comfortable listening level.

### **Troubleshooting:**

Q: My Receiver will not turn on.

A: Please make sure your Receiver is recharged and has enough power. Plug the Receiver to a charger and check if the indicator becomes solid red.

Q: Pairing to a BT device doesn't work.

A: Please do the following:

- Make sure the Receiver is turned on and the LED indicator is flashing blue and red.
- Make sure the Receiver and the BT device are close to each other within 3 feet.
- Turn off the Receiver and the BT device, then turn on the Receiver and then restart BT device. Then retry the pairing method.
- Make sure your Bluetooth device supports A2DP.

Q: After pairing, the Receiver disconnects or there is too much background noise.

A: Please do the following:

- Recharge your Receiver, the power may be too low.
- Units are out of range (10 meters maximum). Bring units closer together.
- Remove any object (electrical or magnetic) that may be interfering or blocking the signal between units.

Q: After pairing and connecting with my BT device, I can not hear music/audio.

A: Please check the following:

- Your BT device is connected to Receiver. The LED indicator should flash blue once every 5 seconds.
- Make sure the volume is at an audible level on both your Receiver and the BT device.
- Make sure the BT device is playing music/audio.

Q: The LED indicator does not show solid red when charging the Receiver.

A: The Receiver has been discharged for too long. Leave the unit on charge for about 30 minutes and the LED indicator should show solid red.